

www.EtherAuthority.io audit@etherauthority.io

SMART CONTRACT

Security Audit Report

Project: ApeCoin Token

Website: apecoin.com

Platform: Ethereum

Language: Solidity

Date: February 17th, 2024

Table of contents

Introduction4	
Project Background4	
Audit Scope4	
Claimed Smart Contract Features 5	
Audit Summary6	
Technical Quick Stats 7	
Business Risk Analysis 8	
Code Quality 9	
Documentation9	
Use of Dependencies9	
AS-IS overview)
Severity Definitions1	1
Audit Findings	2
Conclusion14	1
Our Methodology19	5
Disclaimers17	7
Appendix	
Code Flow Diagram 1	8
Slither Results Log	9
Solidity static analysis	0
Solhint Linter	1

THIS IS SECURITY AUDIT REPORT DOCUMENT AND WHICH MAY CONTAIN INFORMATION WHICH IS CONFIDENTIAL. WHICH INCLUDES ANY POTENTIAL VULNERABILITIES AND MALICIOUS CODES WHICH CAN BE USED TO EXPLOIT THE SOFTWARE. THIS MUST BE REFERRED INTERNALLY AND ONLY SHOULD BE MADE AVAILABLE TO THE PUBLIC AFTER ISSUES ARE RESOLVED.

Introduction

As part of EtherAuthority's community smart contracts audit initiatives, the ApeCoin Token smart contract from apecoin.com was audited extensively. The audit has been performed using manual analysis as well as using automated software tools. This report presents all the findings regarding the audit performed on February 17th, 2024.

The purpose of this audit was to address the following:

- Ensure that all claimed functions exist and function correctly.
- Identify any security vulnerabilities that may be present in the smart contract.

Project Background

- The ApeCoin Token is an ERC20-based smart contract. It is implemented using OpenZeppelin's library. It sets up an ERC-20 token with a name, symbol, and total supply, and mints the initial supply to the deployer of the contract.
- The contract is without any other custom functionality and without any ownership control, which makes it truly decentralized.

Audit scope


Name	Code Review and Security Analysis Report for ApeCoin Token Smart Contract	
Platform	Ethereum	
Language	Solidity	
File	SimpleToken.sol	
Ethereum Code	0x4d224452801aced8b2f0aebe155379bb5d594381	
Audit Date	February 17th, 2024	

Claimed Smart Contract Features

Claimed Feature Detail	Our Observation
Tokenomics: Name: ApeCoin Symbol: APE Decimals: 18 Total Supply:1 billion	YES, This is valid.
Ownership Control:	YES, This is valid.

Audit Summary

According to the standard audit assessment, the Customer's solidity-based smart contracts are "Secured". This token contract does not have any ownership control, hence it is 100% decentralized.



We used various tools like Slither, Solhint, and Remix IDE. At the same time, this finding is based on a critical analysis of the manual audit.

All issues found during automated analysis were manually reviewed and applicable vulnerabilities are presented in the Audit Overview section. The general overview is presented in the AS-IS section and all identified issues can be found in the Audit overview section.

We found 0 critical, 0 high, 0 medium, 0 low, and 1 very low level issues.

Investor Advice: A technical audit of the smart contract does not guarantee the ethical nature of the project. Any owner-controlled functions should be executed by the owner with responsibility. All investors/users are advised to do their due diligence before investing in the project.

Technical Quick Stats

Main Category	Subcategory	Result
Contract	The solidity version is not specified	Passed
Programming	The solidity version is too old	Passed
	Integer overflow/underflow	Passed
	Function input parameters lack check	Passed
	Function input parameters check bypass	Passed
	Function access control lacks management	Passed
	Critical operation lacks event log	Passed
	Human/contract checks bypass	Passed
	Random number generation/use vulnerability	N/A
	Fallback function misuse	Passed
	Race condition	Passed
	Logical vulnerability	Passed
	Features claimed	Passed
	Other programming issues	Moderated
Code	Function visibility not explicitly declared	Passed
Specification	Var. storage location not explicitly declared	Passed
	Use keywords/functions to be deprecated	Passed
	Unused code	Passed
Gas Optimization	"Out of Gas" Issue	Passed
	High consumption 'for/while' loop	Passed
	High consumption 'storage' storage	Passed
	Assert() misuse	Passed
Business Risk	The maximum limit for mintage not set	Passed
	"Short Address" Attack	Passed
	"Double Spend" Attack	Passed

Overall Audit Result: PASSED

Business Risk Analysis

Category	Result
Buy Tax	0%
Sell Tax	0%
Cannot Buy	Yes
Cannot Sell	Yes
Max Tax	0%
Modify Tax	No
Fee Check	Not Detected
Is Honeypot	Not Detected
Trading Cooldown	Not Detected
Can Pause Trade?	Not Detected
Pause Transfer?	Not Detected
Max Tax?	No
Is it Anti-whale?	Not Detected
Is Anti-bot?	Not Detected
ls it a Blacklist?	No
Blacklist Check	No
Can Mint?	No
Is it Proxy?	No
Can Take Ownership?	No
Hidden Owner?	Not Detected
Self Destruction?	Not Detected
Auditor Confidence	High

Overall Audit Result: PASSED

Code Quality

This audit scope has 1 smart contract. Smart contracts contain Libraries, Smart contracts,

inherits, and Interfaces. This is a compact and well-written smart contract.

The libraries in ApeCoin Token are part of its logical algorithm. A library is a different type

of smart contract that contains reusable code. Once deployed on the blockchain (only

once), it is assigned a specific address and its properties/methods can be reused many

times by other contracts in the ApeCoin Token.

The EtherAuthority team has no scenario and unit test scripts, which would have helped to

determine the integrity of the code in an automated way.

Code parts are not well commented on in the smart contracts. Ethereum's NatSpec

commenting style is recommended.

Documentation

We were given an ApeCoin Token smart contract code in the form of an Etherscan web

link.

As mentioned above, code parts are not well commented on but the logic is

straightforward. So it is easy to quickly understand the programming flow as well as

complex code logic. Comments are very helpful in understanding the overall architecture

of the protocol.

Use of Dependencies

As per our observation, the libraries are used in this smart contract infrastructure that are

based on well known industry standard open source projects.

Apart from libraries, its functions are not used in external smart contract calls.

AS-IS overview

Functions

SI.	Functions	Туре	Observation	Conclusion
1	constructor	write	Passed	No Issue
2	name	read	Passed	No Issue
3	symbol	read	Passed	No Issue
4	decimals	read	Passed	No Issue
5	totalSupply	read	Passed	No Issue
6	balanceOf	read	Passed	No Issue
7	transfer	write	Passed	No Issue
8	allowance	read	Passed	No Issue
9	approve	write	Passed	No Issue
10	transferFrom	write	Passed	No Issue
11	increaseAllowance	write	Passed	No Issue
12	decreaseAllowance	write	Passed	No Issue
13	_transfer	internal	Passed	No Issue
14	_mint	internal	Passed	No Issue
15	burn	internal	Passed	No Issue
16	_approve	internal	Passed	No Issue
17	beforeTokenTransfer	internal	Passed	No Issue
18	_afterTokenTransfer	internal	Passed	No Issue
19	_msgSender	internal	Passed	No Issue
20	_msgData	internal	Passed	No Issue

Severity Definitions

Risk Level	Description	
Critical	Critical vulnerabilities are usually straightforward to exploit and can lead to token loss etc.	
High	High-level vulnerabilities are difficult to exploit; however, they also have significant impact on smart contract execution, e.g. public access to crucial	
Medium	Medium-level vulnerabilities are important to fix; however, they can't lead to tokens lose	
Low	Low level vulnerabilities are mostly related to outdated, unused etc. code snippets, that can't have significant impact on execution	
Lowest / Code Style / Best Practice	Lowest-level vulnerabilities, code style violations and info statements can't affect smart contract execution and can be ignored.	

Audit Findings

Critical Severity

No Critical severity vulnerabilities were found.

High Severity

No High severity vulnerabilities were found.

Medium

No Medium severity vulnerabilities were found.

Low

No Low Severity vulnerabilities were found.

Very Low / Informational / Best practices:

(1) Pragma:

```
- Version used: ['^0.8.0', '^0.8.10']
- ^0.8.0 (Context.sol#4)
- ^0.8.0 (ERC20.sol#4)
- ^0.8.0 (IERC20.sol#4)
- ^0.8.0 (IERC20Metadata.sol#4)
- ^0.8.10 (SimpleToken.sol#3)
```

Detected different pragmas used.

Resolution: We suggest using one solidity compiler version.

Centralization Risk

The ApeCoin Token smart contract does not have any ownership control, **hence it is 100% decentralized.**

Therefore, there is **no** centralization risk.

Conclusion

We were given a contract code in the form of <a>Etherscan web links. And we have used all

possible tests based on given objects as files. We observed 1 Informational issue in the

smart contracts. but those are not critical. So, it's good to go for the production.

Since possible test cases can be unlimited for such smart contracts protocol, we provide

no such guarantee of future outcomes. We have used all the latest static tools and manual

observations to cover the maximum possible test cases to scan everything.

Smart contracts within the scope were manually reviewed and analyzed with static

analysis tools. Smart Contract's high-level description of functionality was presented in the

As-is overview section of the report.

Audit report contains all found security vulnerabilities and other issues in the reviewed

code.

Security state of the reviewed smart contract, based on standard audit procedure scope, is

"Secured".

Our Methodology

We like to work with a transparent process and make our reviews a collaborative effort.

The goals of our security audits are to improve the quality of the systems we review and

aim for sufficient remediation to help protect users. The following is the methodology we

use in our security audit process.

Manual Code Review:

In manually reviewing all of the code, we look for any potential issues with code logic, error

handling, protocol and header parsing, cryptographic errors, and random number

generators. We also watch for areas where more defensive programming could reduce the

risk of future mistakes and speed up future audits. Although our primary focus is on the

in-scope code, we examine dependency code and behavior when it is relevant to a

particular line of investigation.

Vulnerability Analysis:

Our audit techniques included manual code analysis, user interface interaction, and white

box penetration testing. We look at the project's website to get a high-level understanding

of what functionality the software under review provides. We then meet with the

developers to gain an appreciation of their vision of the software. We install and use the

relevant software, exploring the user interactions and roles. While we do this, we

brainstorm threat models and attack surfaces. We read design documentation, review

other audit results, search for similar projects, examine source code dependencies, skim

open issue tickets, and generally investigate details other than the implementation.

Documenting Results:

We follow a conservative, transparent process for analyzing potential security vulnerabilities and seeing them through successful remediation. Whenever a potential issue is discovered, we immediately create an Issue entry for it in this document, even though we have not yet verified the feasibility and impact of the issue. This process is conservative because we document our suspicions early even if they are later shown to not represent exploitable vulnerabilities. We generally follow a process of first documenting the suspicion with unresolved questions, then confirming the issue through code analysis, live experimentation, or automated tests. Code analysis is the most tentative, and we strive to provide test code, log captures, or screenshots demonstrating our confirmation. After this we analyze the feasibility of an attack in a live system.

Suggested Solutions:

We search for immediate mitigations that live deployments can take, and finally we suggest the requirements for remediation engineering for future releases. The mitigation and remediation recommendations should be scrutinized by the developers and deployment engineers, and successful mitigation and remediation is an ongoing collaborative process after we deliver our report, and before the details are made public.

Disclaimers

EtherAuthority.io Disclaimer

EtherAuthority team has analyzed this smart contract in accordance with the best industry practices at the date of this report, in relation to: cybersecurity vulnerabilities and issues in smart contract source code, the details of which are disclosed in this report, (Source Code); the Source Code compilation, deployment and functionality (performing the intended functions).


Due to the fact that the total number of test cases is unlimited, the audit makes no statements or warranties on the security of the code. It also cannot be considered as a sufficient assessment regarding the utility and safety of the code, bug-free status, or any other statements of the contract. While we have done our best in conducting the analysis and producing this report, it is important to note that you should not rely on this report only. We also suggest conducting a bug bounty program to confirm the high level of security of this smart contract.

Technical Disclaimer

Smart contracts are deployed and executed on the blockchain platform. The platform, its programming language, and other software related to the smart contract can have their own vulnerabilities that can lead to hacks. Thus, the audit can't guarantee the explicit security of the audited smart contracts.

Appendix

Code Flow Diagram - ApeCoin Token

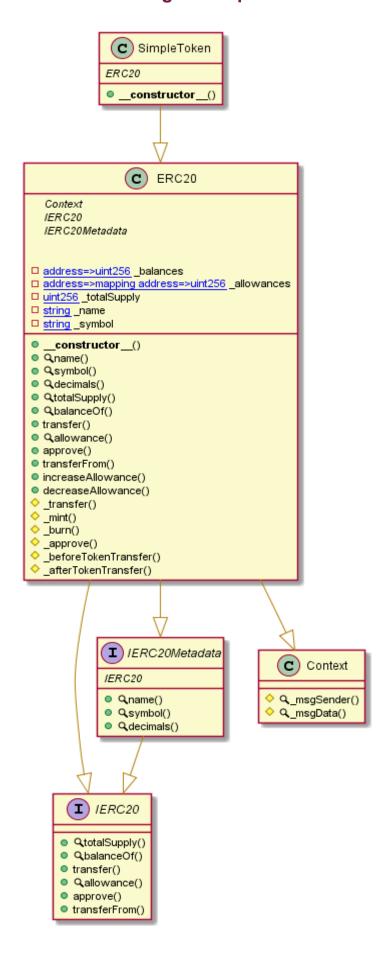

This is a private and confidential document. No part of this document should be disclosed to third party without prior written permission of EtherAuthority.

Email: audit@EtherAuthority.io

Slither Results Log

Slither is a Solidity static analysis framework that uses vulnerability detectors, displays contract details, and provides an API for writing custom analyses. It helps developers identify vulnerabilities, improve code comprehension, and prototype custom analyses quickly. The analysis includes a report with warnings and errors, allowing developers to quickly prototype and fix issues.

We did the analysis of the project altogether. Below are the results.

Slither Log >> SimpleToken.sol

Solidity Static Analysis

Static code analysis is used to identify many common coding problems before a program is released. It involves examining the code manually or using tools to automate the process. Static code analysis tools can automatically scan the code without executing it.

SimpleToken.sol

Gas costs:

Gas requirement of function SimpleToken.decreaseAllowance is infinite: If the gas requirement of a function is higher than the block gas limit, it cannot be executed. Please avoid loops in your functions or actions that modify large areas of storage (this includes clearing or copying arrays in storage)

Pos: 276:4:

Constant/View/Pure functions:

ERC20._beforeTokenTransfer(address,address,uint256): Potentially should be constant/view/pure but is not.

more

Pos: 410:4:

Similar variable names:

ERC20._burn(address,uint256): Variables have very similar names "account" and "amount".

Pos: 368:49:

Guard conditions:

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

more

Pos: 390:8:

Solhint Linter

Linters are the utility tools that analyze the given source code and report programming errors, bugs, and stylistic errors. For the Solidity language, there are some linter tools available that a developer can use to improve the quality of their Solidity contracts.

SimpleToken.sol

```
requirement
Explicitly mark visibility in function (Set ignoreConstructors to
Error message for require is too long
Error message for require is too long
Pos: 9:277
Error message for require is too long
Pos: 9:304
Error message for require is too long
Error message for require is too long
Error message for require is too long
Pos: 9:359
Error message for require is too long
Code contains empty blocks
Code contains empty blocks
Pos: 24:433
Explicitly mark visibility in function (Set ignoreConstructors to
Pos: 5:438
```

Software analysis result:

This software reported many false positive results and some are informational issues. So, those issues can be safely ignored.



This is a private and confidential document. No part of this document should be disclosed to third party without prior written permission of EtherAuthority.

Email: audit@EtherAuthority.io